

NEW PATENT APPLICATION
Assistant Commissioner for Patents
Washington, D.C. 20231

Attorney Docket No.: MLNR-08101

NEW APPLICATION TRANSMITTAL

Transmitted herewith for filing is the patent application of Inventor: Gwilym Francis Luff et al.

Title: NOVEL TOPOLOGY FOR A SINGLE ENDED INPUT DUAL BALANCED MIXER

CERTIFICATION UNDER 37 CFR § 1.10

I hereby certify that this New Application and the documents referred to as enclosed herein are being deposited with the United States Postal Service on this date, November 22, 2000, in an envelope bearing "Express Mail Post Office To Addressee" Mailing Label Number EL703212555US addressed to: **PATENT APPLICATION**, Assistant Commissioner for Patents, Washington, D.C. 20231.

Tadas Naraukas
(Name of Person Mailing Paper)

Tadas Naraukas
Signature

Enclosed are:

1. The papers required for filing date under CFR § 1.53(b):
26 Pages of Specification (including claims); 7 Sheet(s) of Drawings.
X Formal
- Informal
2. X Declaration or Oath (executed by Gwilym Luff)
3. - Power of Attorney by Assignee
4. - Assignment of the Invention to Micro Linear Corporation (including Form PTO-1595).
5. Fee Calculation
- Amendment changing number of claims or deleting multiple dependencies is enclosed.

CLAIMS AS FILED

	Number Filed	Number Extra	Rate	Basic Fee
Total Claims	21 - 20 =	1	\$18.00	18.00
Independent Claims	6 - 3 =	3	\$80.00	240.00
Multiple Dependent claim(s), if any			\$270.00	
			Filing Fee Calculation	\$968.00

6. X Applicants qualify for Small Entity Status
50% Filing Fee Reduction (if applicable) \$484.00
7. Other Fees
- Assignment Recordation Fee
- Other 0.00
TOTAL FEES ENCLOSED \$484.00
8. Payment of Fees
X Check in the amount of \$484.00 enclosed.
9. X Authorization to Charge Additional Fees
The Commissioner is hereby authorized to charge any additional fees (or credit any overpayment) associated with this communication and which may be required under 37 CFR § 1.16 or § 1.17 to Account No. 08-1275. An originally executed duplicate of this transmittal is enclosed for this purpose.
10. - Information Disclosure Statement
11. X Return Receipt Postcard

Dated: November 22, 2000

By: Thomas B. Haverstock
Name: Thomas B Haverstock
Registration No.: 32,571

PATENTAtty. Docket No. MLNR-08101**NOVEL TOPOLOGY FOR A SINGLE ENDED INPUT DUAL BALANCED MIXER**Related Applications:

This application claims priority under 35 U.S.C. § 119(e) of the co-pending U.S. provisional application Serial Number 60/167,188 filed on November 23, 1999 and entitled
 5 “NOVEL TOPOLOGY FOR A SINGLE ENDED INPUT DUAL BALANCED MIXER.” The provisional application serial number 60/167,188 filed on November 23, 1999 and entitled “NOVEL TOPOLOGY FOR A SINGLE ENDED INPUT DUAL BALANCED MIXER” is also hereby incorporated by reference.

10

Field of the Invention:

This invention relates to the field of radio frequency (RF) mixers. More particularly, this invention relates to dual balanced RF mixers with a single ended input.

15 Background of the Invention:

Mixer circuits are well known in the electronics industry. Mixers have many applications and their use has been extensive. One of the more common applications has been in radio frequency receivers as frequency multipliers or converters. Typically in these types of applications, an incoming modulated RF signal is combined with the signal of a local oscillator (LO) to produce a modulated intermediate frequency (IF) signal. The IF output of the mixer is
 20 the difference and sum of the frequencies between the RF and LO frequencies and is then further processed by other known circuits or devices, such as an on-chip active filter.

Many types of mixers are known. One example of a mixer commonly known in the art is the double balanced mixer or the 'Gilbert Cell' or 'Gilbert Mixer' as shown in Figure 1. The
 25 Gilbert cell is named after its inventor and since then many other mixer topologies have utilized this basic approach. Further modifications and enhancements to the Gilbert cell have been made and are known in the art as will be discussed hereinafter.

The conventional Gilbert cell mixer 10 of Figure 1 is made up of a RF input stage 20 and a mixer core 30. The RF input stage includes two transistors Q1 and Q2. The base terminal of the

first transistor Q1 is coupled to one of two RF signal inputs. The emitter terminal of the first transistor Q1 is coupled to the emitter terminal of the second transistor Q2 and to the current source I1. The collector terminal of the first transistor Q1 is connected to the first pair of differentially connected transistors Q3 and Q4 in the mixer core. The base terminal of the second transistor Q2 is coupled to the second RF signal input. The collector of the second transistor Q2 is coupled to the second pair of differentially connected transistors Q5 and Q6 in the mixer core.

The mixer core is made up of four transistors Q3, Q4, Q5, Q6 coupled as two differentially cross-coupled pairs. The first differentially cross-coupled pair Q3 and Q4 is commonly connected by way of the emitter terminals and further connected to the collector of the first transistor Q1 in the RF input stage. The second differentially cross-coupled pair Q5 and Q6 is also connected by common emitters and further coupled to the collector of the second transistor Q2 in the RF input stage. The base terminal of the first transistor Q3 in the first differential cross-coupled pair of transistors is coupled to the base terminal of the second transistor Q6 of the second differential cross-coupled pair and further coupled to one of two LO input terminals. Similarly, the base terminal of the second transistor Q4 of the first differential cross-coupled pair is coupled to the base terminal of the first transistor Q5 of the second differential cross-coupled pair and further coupled to the second LO input terminal. The collector terminal of the first transistor Q3 of the first differential cross-coupled pair is coupled to the collector terminal of the first transistor Q5 of the second differential cross-coupled pair and further connected to one of two IF output terminals. The collector terminal of the second transistor Q4 of the first differential cross-coupled pair is coupled to the collector terminal of the second transistor Q6 of the second differential cross-coupled pair and further connected to the second IF output terminal.

The operation of the Gilbert cell mixer is well known and need not be elaborated here. In spite of the advantages of the Gilbert cell, there are inherent limitations. For example, the Gilbert cell has limited dynamic range, which is the difference between IP3 (third order intercept point) and noise figure for a given power consumption. The Gilbert mixer's noise figure, linearity, and current drain performance also have been conventionally defined. Consequently, inventions since the introduction of the Gilbert cell have centered on improving various parametric

concerns usually dependent on unique mixer applications. One such case is the 'Micromixer' which is described in detail in "The MICROMIXER: A Highly Linear Variant of the Gilbert Mixer Using a Bisymmetric Class-AB Input Stage," by Barrie Gilbert, IEEE Journal of Solid-State Circuits, Vol. 32, No.9, September 1997 and hereby incorporated by reference.

5 Referring to Figure 2, the difference between the Micromixer and the Gilbert mixer of Figure 1 is apparent. The differential pair in the RF Input section of the Gilbert cell of Figure 1 has been replaced by a bisymmetric Class AB topology in the Micromixer of Figure 2. The operation of the Micromixer is also known in the art. This improvement over the Gilbert mixer results in increased mixer performance by way of increased linearity, accurate input impedance,
10 high intermodulation intercepts and nearly unlimited signal capacity. It does not, however, significantly improve noise figure.

Another technique to improve the performance of conventional Gilbert mixers is the use of emitter degeneration resistors. This technique, however, introduces resistive thermal noise, which degrades the dynamic range of the differential pair in the RF input section. Yet another
15 technique to improve the performance of the Gilbert mixer involves the use of multi-tanh doublets or triplets as demonstrated in U. S. Patent Number 6,054,889, "Mixer with Improved Linear Range." While the use of multi-tanh doublet or triplet approach into a conventional Gilbert mixer improves its performance, it does so at the expense of increasing complexity and loss of valuable chip real estate. Additionally, matching impedance to 50 Ω typically requires
20 impedance transformation at the input.

In other types of mixers, the diode ring and Schottky diode ring mixer for example, the use of baluns, active or passive, increase mixer performance. As demonstrated in U. S. Patent numbers 6,094,570, "Double-balanced Monolithic Microwave Integrated Circuit Mixer" and 6,078,802, "High Linearity Active Balance Mixer, the use of baluns is known in the art and
25 provide the transfer of RF energy from an unbalanced structure to a balanced structure thereby increasing mixer parametric performance such as linearity and impedance matching for example. Despite advances in integrated circuit fabrication, the use of baluns still take up valuable chip real estate and their use is a compromise in circuit design.

What is needed is a mixer circuit that addresses the known deficiencies in the prior art mixers. Specifically, what is needed is an improved mixer circuit, which provides increased mixer performance by way of a single ended input, and which exhibits a high dynamic range, a low noise figure, and with no off chip differential RF circuit or baluns required.

5

Summary of the Invention:

Briefly, according to the invention, a mixer circuit having a single ended input and a dual output is provided. The mixer circuit is a singled ended input to a double balanced high dynamic range mixer with only two base-emitter junctions across the supply. It provides for the use of bondwires to off chip ground as DC block and DC feed elements. The single ended input and differential output balanced mixer is well suited for the input stage of an integrated radio receiver - off chip circuitry is usually single ended, but on chip circuits are usually differential. No off chip differential RF circuits or baluns are required which reduces off chip component count and improves radio performance. The mixer circuit has lower LO drive requirements because of the DC coupled LO port. This results in better radio performance and a smaller die area because of the DC coupled IF port.

10

15

The combination of all embodiments described results in a mixer performance significantly higher than the well known Gilbert Cell mixer, and whose RF, LO and IF ports require no extra on chip or off chip interface circuits. The first implementation is for 900 MHz operation in the IRIS 900 low IF receiver section. As a regular down conversion mixer (Figure 3) it achieves a noise figure of 5.5 dB, a power gain of 9 dB, an input IP3 of -8 dBm, and an input P1dB of -16dBm. Because of the impedance change from 50 ohms matched at the input to 1K + 1K differential open circuit at the output, the voltage gain is 28 dB. Power consumption is 7 mA from a 2.9 V supply. Used as a quadrature image rejection mixer the noise figure is 8.5 dB with the same gain and large signal performance.

20

25

Brief Description of the Drawings:

Figure 1 is a schematic drawing of a prior art Gilbert Cell mixer.

Figure 2 is a schematic drawing of a prior art MICROMIXER balanced mixer.

Figure 3 is a schematic drawing of a basic mixer according to the invention.

Figure 4 is a schematic drawing of a quadrature mixer according to the present invention.

Figure 5 is a schematic drawing of a mixer with a cascode connection of Q1 with RF feedback.

5 Figure 6 is a schematic drawing of a tracking supply for LO buffers.

Figure 7 is a schematic drawing of a tracking mixer bias current circuit.

Detailed Description of a Preferred Embodiment:

10 This novel mixer topology circuit was developed as the input stage of the highly integrated receiver. This application requires a down conversion mixer with a higher dynamic range than the standard Gilbert cell, and with a single ended input to interface to an off chip filter. The mixer input is at 902-928 MHz, and its output is at the 1.024 MHz intermediate frequency of the receiver.

15 Figure 3 shows the basic features of the new invention. The mixer 40 is generally shown. The mixer includes of the mixer core 50 and the RF input stage 60. The mixer core 50 is coupled to the RF input stage 60. The mixer core 50 includes of four transistors Q4-Q7 coupled as two differentially cross-coupled pairs as in the prior art of Figure 2. The first differential transistor pair Q4 and Q5 are common emitter connected to the RF input stage 60 by way of the collector terminal of a transistor Q2 in the RF input stage 60. Similarly, the second differential transistor pair Q6 and Q7 are also common emitter coupled to the RF input stage 60 by way of the collector terminal of transistor Q3 in the RF input stage 60.

20 The base terminal of the first transistor Q4 in the first differential pair of transistors is coupled to the base terminal of the second transistor Q7 of the second differential pair and further coupled to one of two LO input terminals. Similarly, the base terminal of the second transistor Q5 of the first differential pair is coupled to the base terminal of the first transistor Q6 of the second differential pair and further coupled to the second LO input terminal. The collector terminal of the first transistor Q4 of the first differential pair is coupled to the collector terminal of the first transistor Q6 of the second differential pair and further connected to one of two IF output terminals and to the first terminal of a load resistor R2. The second terminal of the

load resistor R2 is coupled to a voltage source V_{cc} . The collector terminal of the second transistor Q5 of the first differential pair is coupled to the collector terminal of the second transistor Q7 of the second differential pair and further connected to the second IF output terminal and to a second load resistor R3. The second terminal of the second load resistor R3 is also connected to the voltage source V_{cc} .

Referring to the RF input stage 60, the RF input signal is applied to the base of a first transistor Q1 via a matching network. Here, an inductor L3 is used as a matching network, however it is understood that other types of matching networks could be used. The first transistor Q1 has three principle functions:

1. It presents a reasonable input impedance (e.g. only one external inductor is required to match the input to 50 ohms);
2. It acts as phase splitter, producing out of phase waveforms at its collector and emitter.
3. It acts as a low noise input device, defining the noise figure of the mixer.

The base terminal of the first transistor Q1 is coupled to one terminal of an inductor L3 and to a biasing resistor R_{b1} . The second terminal of the inductor L3 is coupled to the RF input. The second terminal of the resistor R_{b1} is coupled to a bias current source Bias 1. The emitter terminal of the first transistor Q1 is coupled to the first terminal of an inductor L1 and further coupled to the emitter of a cascode transistor Q3. The second terminal of the inductor L3 is coupled to ground. The collector terminal of the first transistor Q1 is coupled to the first terminal of a resistor R1 and to the first terminal of a capacitor C3. The second terminal of the resistor R1 is coupled to a voltage source V_{cc} for example. The second terminal of the capacitor C3 is coupled to the first terminal of the inductor L2 and to the emitter terminal of a cascode transistor Q2.

The RF input stage 60 further includes two cascode transistors Q2 and Q3 having a common base connection. The emitter terminal of the first cascode transistor Q2 is coupled to the collector of the first transistor Q1 by way of the connections to the capacitor C3 and the

resistor R1. The emitter terminal of the second cascode transistor Q3 is coupled to the emitter terminal of the first transistor Q1 and to the first terminal of the inductor L1. The emitter terminals of the cascode transistors Q2 and Q3 are further coupled to two capacitors C1 and C2 in series and further coupled to a bias source, Bias 2.

5 In operation, the two cascode transistors Q2 and Q3 isolate the RF input stage 60 circuitry from the mixer core's LO drive signal and its harmonics. The mixer core's differentially coupled transistors Q4, Q5, Q6, and Q7 perform the frequency conversion from RF to IF. They act as an analog multiplier, so that the output current from the four transistors Q4, Q5, Q6, and Q7 is the product of the RF input and the LO signals. These currents develop a differential
10 output voltage across the load resistors R2 and R3.

The cascode arrangement of the two cascode transistors Q2 and Q3 is 'folded' to increase the headroom available at the output. The emitter of the first transistor Q1 can be directly connected to the emitter of the second cascode transistor Q3, and the capacitor C3 level shifts the signal between the collector of the first transistor Q1 and the emitter of the first cascode
15 transistor Q2.

The two inductors L1 and L2 in combination with the capacitors form a tuned circuit and provide a DC feed path, keeping the emitters of the two cascode transistor Q2 and Q3 at the same DC potential. The inductors L1, L2, and part of the input matching inductor L3 can be IC package inductances so on chip inductors are not required. The capacitors C1 and C2 tune out
20 the inductance of the two inductors L1 and L2, and provide an RF 'center' tap' to define the RF voltage at the bases of the two cascode transistors Q2 and Q3.

In further embodiments of the invention, different transistors could be used. For example, the circuits presented could be undertaken with NPN transistors, PNP transistors, MOSFET or MESFET devices or any combination thereof using conventional design techniques for such
25 substitutions.

Quadrature Mixer

In another embodiment of the invention, a quadrature mixer is presented. Quadrature mixers are used in image rejection, Low IF or Zero IF applications. To form the quadrature

mixer circuit of this embodiment, the mixer core 20 of Figure 3 (Q4-Q7) can be duplicated and the RF input stage 60 of Figure 3 can be modified to provide two sets of cascode transistors as is shown in Figure 4.

The quadrature mixer 70 of Figure 4, thus, is made up of a mixer core 80 and a RF input stage 90. The mixer core 80 consists of two sets of four transistors Q4-Q7 and Q10-Q13 coupled as four differentially cross-coupled transistor pairs. The first set of differentially cross coupled transistors pairs Q4-Q7 in the mixer core 70 is identical to the transistors in the mixer core of Figure 3.

Referring to Figure 4 and the first set of differentially cross-coupled transistors pairs Q4-Q7, the base terminal of the first transistor Q4 in the first differential pair of transistors Q4, Q5 is coupled to the base terminal of the second transistor Q7 of the second differential pair Q6, Q7 and further coupled to one of two In-Phase LO input terminals. Similarly, the base terminal of the second transistor Q5 of the first differential pair Q4, Q5 is coupled to the base terminal of the first transistor Q6 of the second differential pair Q6, Q7 and further coupled to the second In-Phase LO input terminal. The collector terminal of the first transistor Q4 of the first differential pair Q4, Q5 is coupled to the collector terminal of the first transistor Q6 of the second differential pair Q6, Q7 and further coupled to one of two In-Phase IF output terminals and to the first terminal of a load resistor R2. The second terminal of the load resistor R2 is coupled to a voltage source V_{cc} . The collector terminal of the second transistor Q5 of the first differential pair Q4, Q5 is coupled to the collector terminal of the second transistor Q7 of the second differential pair Q6, Q7 and further connected to the second In-Phase IF output terminal and to a first terminal of a second load resistor R3. The second terminal of the second load resistor R3 is also coupled to the voltage source V_{cc} .

The first differential transistor pair Q4, Q5 of the first set of differentially cross coupled transistors pairs Q4-Q7, are common emitter connected to the RF input stage 90 and further connected to the collector terminal of a transistor Q2 in the RF input stage 90. Similarly, the second differential transistor pair Q6, Q7 are also common emitter connected to the RF input stage 90 by way of the collector terminal of a transistor Q3 in the RF input stage 90.

Referring again to Figure 4 and now the second set of differentially cross coupled transistors pairs Q10-Q13, the base terminal of the first transistor Q10 in the first differential pair of transistors Q10, Q11 is coupled to the base terminal of the second transistor Q13 of the second differential pair Q12, Q13 and further coupled to one of two Quadrature Phase LO input terminals. Similarly, the base terminal of the second transistor Q11 of the first differential pair of transistors Q10, Q11 is coupled to the base terminal of the first transistor Q12 of the second differential pair of transistors Q12, Q13 and further coupled to the second Quadrature Phase LO input terminal. The collector terminal of the first transistor Q10 of the first differential pair of transistors Q10, Q11 is coupled to the collector terminal of the first transistor Q12 of the second differential pair of transistors Q12, Q13 and further coupled to one of two Quadrature Phase IF output terminals and to the first terminal of a load resistor R4. The second terminal of the load resistor R4 is coupled to a voltage source V_{cc} . The collector terminal of the second transistor Q11 of the first differential pair of transistors Q10, Q11 is coupled to the collector terminal of the second transistor Q13 of the second differential pair of transistors Q12, Q13 and further coupled to the second Quadrature Phase IF output terminal and to a first terminal of a second load resistor R5. The second terminal of the second load resistor R5 is also coupled to the voltage source V_{cc} .

The first differential transistor pair Q10, Q11 of the second set of differentially cross coupled transistors pairs Q10-Q13, have their common emitters connected to the RF input stage 90 by way of the collector terminal of a transistor Q8 in the RF input stage 90. Similarly, the second differential transistor pair Q12, Q13 are also common emitter coupled to the RF input stage 90 by way of the collector terminal of a transistor Q9 in the RF input stage 90.

Referring now to the RF input stage 90 of Figure 4, the base terminal of the input transistor, Q1, is coupled to one terminal of a biasing resistor, R_{b1} and to an inductor, L3. The second terminal of the inductor L3 is coupled to the RF signal input. The second terminal of the biasing resistor R_{b1} is coupled to a bias current source Bias 1. The emitter terminal of the input transistor Q1 is coupled to the first terminal of an inductor L1 and further coupled to the emitter terminals of two cascode transistors Q3, Q9. The second terminal of the inductor L3 is coupled to ground. The collector terminal of the input transistor Q1 is coupled to the first terminal of a

resistor R1 and to the first terminal of a capacitor C3. The second terminal of the resistor R1 is coupled to a voltage source V_{cc} for example. The second terminal of the capacitor C3 is coupled to the first terminal of the inductor L2 and to the emitter terminals of two cascode transistors Q2, Q8.

5 The RF input stage 90 includes two pairs of cascode transistors Q2, Q3 and Q8, Q9. The first pair of cascode transistors Q2, Q3 has a common base connection and is further coupled to two capacitors C1, C2 and to the first terminal of a biasing resistor R_{b2} . The emitter terminal of the first cascode transistor Q2 of the first pair of cascode transistors Q2, Q3 is coupled to the collector terminal of the input transistor Q1 by way of the connections to the capacitor C3 and
10 the inductor L2. The emitter terminal of the second cascode transistor Q3 of the first pair of cascode transistors Q2, Q3 is coupled to the emitter terminal of the input transistor Q1 and the emitter terminal of the second cascode transistor Q9 of the second pair of cascode transistors Q8, Q9, and to the first terminal of the inductor L1. The emitter terminals of the first pair of cascode transistors Q2, Q3 are further coupled to two capacitors C1 and C2 in series and further coupled
15 to a bias source, Bias 2 by way of a biasing resistor R_{b2} .

 The second pair of cascode transistors Q8, Q9 also have a common base connection. The base terminals of the second pair of cascode transistors Q8, Q9 are further coupled to the first terminal of a biasing resistor R_{b3} and to two capacitors C4, C5. The emitter terminal of the first cascode transistor Q8 of the second pair of cascode transistors Q8, Q9 is coupled the emitter
20 terminal of the input transistor Q1 and to the first cascode transistor Q2 of the first pair of cascode transistors Q1, Q2. The emitter terminal of the second cascode transistor Q9 of the second pair of cascode transistors Q8, Q9 is coupled the input transistor Q1 and to the second cascode transistor Q3 of the first pair of cascode transistors Q2, Q3. The second terminal of the biasing resistor R_{b2} is coupled to the second terminal of the biasing resistor R_{b3} and further
25 coupled to a bias source Bias 2.

 In operation the quadrature mixer operates similarly to other quadrature mixers. The output current from the input transistor is split between the two sets of cascode transistors. If a quadrature pair of LO drive signals is provided to the LO ports, then a quadrature IF output is available at the two IF ports. The LO input signals in the quadrature mixer are the in-phase

portion and the quadrature phase portion of the LO drive signal. The IF output signals are the in-phase portion and the quadrature phase portion of the IF output signal.

RF Feedback

5 Referring to Figure 5, another embodiment is presented to improve the phase splitting capacity of the input transistor and thereby improve the overall mixer performance. The single input transistor Q1 does not give a perfect 180-degree phase split between its collector and emitter terminals. Some of this is caused by the differing impedances at the collector and base - the impedance at the emitter terminal of a second cascode transistor Q3 is half that at the emitter terminal of a first cascode transistor Q2. Another cause of error is the capacitive feedback
10 through the base-collector capacitance of the single input transistor Q1. To improve the phase balance and accurately define the gain, the single input transistor Q1 can be replaced with a cascode connection of two transistors and a resistive feedback added to define the forward gain.

The mixer circuit of Figure 5 is identical to the mixer circuit of Figure 3 with the exception of the an added cascode transistor Q8 coupled to the input transistor Q1 and the added resistive feedback circuit including of a capacitor C4 coupled in series to a resistor R4. Referring
15 to Figure 5, the collector terminal of the input transistor Q1 is coupled to the emitter terminal of the cascode transistor Q8. The base terminal of the cascode transistor Q8 is coupled to a voltage source Vcc. The collector terminal of the cascode transistor Q8 is coupled to the first terminal of a resistor R1 and to the first terminal of a capacitor C3, which is similar to the connection of the input transistor Q1 in Figure 3 and further coupled to a first terminal of another capacitor C4. The second terminal of the capacitor C4 is coupled to the first terminal of a resistor R4. The second terminal of the resistor R4 is coupled to the base terminal of the input transistor Q1.
20

25 LO Port Biasing

To obtain the maximum dynamic range from these mixers, enough voltage headroom must be preserved at the collectors terminals of the differentially cross coupled transistors Q4-Q7 that the full output signal can be developed across the load resistors R2 and R3. At the same time, to stabilize the gain of the mixer it is desirable to keep the transconductances of the

transistors constant with temperature. This requires that the bias current be proportional to absolute temperature (PTAT). If the LO inputs are driven by a Common Mode Logic (CML) buffer with emitter follower outputs (common collector amplifiers), then the common mode DC voltage at the LO inputs will be at $V_{CC} - V_{be}$, and will rise with temperature. The voltage drop across the load resistors R2, R3 will increase with temperature because of the PTAT biasing. The combined effect is to reduce the V_{CE} of the differentially cross-coupled transistors Q4-Q7 at high temperatures, leading to saturation. Reducing the load resistors R2, R3 to avoid saturation at high temperature results in a loss of gain, and poor use of available supply voltage.

The solution employed is to power the LO buffers from a tracking supply. The supply generates $3 * V_{be} + 0.2$ V. This keeps the V_{cb} of the cascode devices (Q2 and Q3) constant at around 0 V. The total headroom at the load resistors R2, R3 is from $V_{bc} + V_{cesat} + 0.2$ to V_{cc} . This headroom increases with temperature to allow for the PTAT current bias.

Referring to Figure 6, one implementation of a tracking supply is shown. It is a conventional low dropout voltage regulator, except that the reference voltage is $2 * V_{be} + 133$ mV. The amplifier has a closed loop gain of 1.5, so that the output voltage of the regulator is $3 * V_{be} + 0.2$ V. Figure 6 shows a single CML buffer with emitter followers. The common mode voltage at the output of the followers will be at $+2 * V_{be}$, and remain there over process and temperature variations.

The tracking supply of Figure 6 includes a first diode-connected transistor Q1 in series with a second diode-connected transistor Q2 and a resistor R1 in series with the second diode-connected transistor Q2. The cathode of the first diode-connected transistor Q1 is coupled to ground and the anode is coupled to the cathode of the second diode-connected transistor Q2. The anode of the second diode-connected transistor Q2 is coupled to the first terminal of a resistor R1. The second terminal of the resistor R1 is coupled to a current source, which is coupled to the voltage source V_{CC} .

The tracking supply circuit further includes an amplifier and a CML buffer. The amplifier includes four terminals. The first terminal of the amplifier is coupled to the second terminal of the resistor R1 and to a current source. The second terminal of the amplifier is

coupled to the voltage supply V_{cc} . The third terminal of the amplifier is coupled to ground and the fourth terminal is coupled to the CML buffer.

The CML buffer includes two common emitter coupled transistors Q3, Q4. The emitter terminals of the two common emitter transistors Q3, Q4 are coupled together and further coupled to ground by way of a connection to a current supply. The base terminal of the first transistor Q3 is coupled to one of two LO drive inputs. The collector terminal of the first transistor Q3 is coupled to the base of one of two common collector amplifiers Q6 and to a first terminal of a resistor R2. The base terminal of the second transistor Q4 is coupled to the second LO drive input. The collector terminal of the second transistor Q4 is coupled to the base terminal of the second common collector amplifier Q5 and to a first terminal of a resistor R3. The emitter of the first common collector amplifier Q5 is coupled to one of two mixer LO drive input terminals and to ground by way of a current source. The collector terminal of the first common collector amplifier Q5 is coupled to the collector terminal of the second common collector amplifier Q6 and to the fourth terminal of the amplifier by way of connections to the second terminals of the first and second resistors R2, R3. The emitter of the second common collector amplifier Q6 is coupled to the second mixer LO drive input terminal and to ground by way of a current source.

Output Common Mode Voltage Control

The output of the mixer is buffered by emitter followers then feeds an on chip active filter for channel selectivity. Ideally the output of the mixer should be DC coupled to the filter. This requires that the common mode voltage at the mixer output match up with the common mode input range of the filter. The tracking bias circuit shown in Figure 7 does this with a fairly simple replica bias generator.

Referring to Figure 7, the tracking bias circuit consists of a first transistor Q1 coupled as a diode-connected transistor having an anode coupled to the first terminal a first resistor R1 and the cathode coupled to the collector terminal of a second transistor Q2. The second terminal of the resistor R1 is coupled to a voltage source V_{cc} . The emitter terminal of the second transistor Q2 is coupled to ground. The base terminal of the second transistor Q2 is coupled to the first

terminal of a second resistor R2. The second terminal of the second resistor R2 is coupled to the output terminal of a loop amplifier and to the bias current terminal Bias 2 of the mixer.

The tracking bias circuit further includes a loop amplifier. The loop amplifier Q3 includes three terminals. The first terminal of the loop amplifier is coupled to the cathode terminal of the diode-connected transistor Q1. The second terminal of the loop amplifier is coupled to the first terminal of a bandgap voltage supply V_{bg} . The third terminal of the loop amplifier is coupled to the second terminal of the second resistor R2 and further coupled to the bias current terminal Bias 2 of the mixer. The second terminal of the bandgap voltage supply is coupled to ground.

In operation, the filter that follows the mixers has its input common mode range centered on the chip bandgap reference voltage ($V_{bg} \sim 1.25$ V). The desired output common mode voltage of the mixers is therefore $V_{bg} + V_{be}$. The simple circuit in Figure 7 achieves this. R1, Q1 and Q2 are ratioed to the corresponding components in the mixer (R2 & R3, Q4 to Q7 and Q2 to Q3) so that they operate at the same current density. The loop amplifier compares the voltage at the first transistor Q1 emitter terminal (a replica of the mixer output common mode voltage) with the bandgap voltage (the desired common mode voltage). With the appropriate feedback, the mixer output common mode voltage is held at the bandgap voltage.

In the application with the mixer operating at a 2.9 V supply, this circuit also generates a partially PTAT bias current. The voltage across the mixer load resistors is $V_{cc} - V_{be} - V_{bg}$. With $V_{cc} - V_{bg} = 1.65$ V the current in R1 is half PTAT. This partially compensates the temperature variation of the device transconductance.

The present invention has been described in terms of specific embodiments incorporating details to facilitate the understanding of the principles of construction and operation of the invention. Such references herein to specific embodiments and details thereof are not intended to limit the scope of the claims appended hereto. It will be apparent to those skilled in the art that modifications may be made in the embodiments chosen for illustration without departing from the spirit and scope of the invention. Specifically, it will be apparent to one of ordinary skill in the art that the circuits of the present invention could be implemented in several different

ways and the circuits disclosed above are only illustrative of the preferred embodiments of the invention and are in no way limitations.

5

10

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218

Claims

What is claimed is:

- 1 1. A mixer circuit for generating an IF output responsive to an RF input and a LO drive
2 source, comprising:
3 a mixer core having a doubly balanced mixer including a first differentially coupled
4 transistor pair and a second differentially coupled transistor pair;
5 an RF input circuit coupled to the mixer core, the RF input circuit comprising:
6 an input inductor having a first terminal coupled to receive an RF input signal and
7 a second terminal;
8 a biasing resistor having a first terminal coupled to the second terminal of the
9 input inductor and a second terminal coupled to a first bias voltage;
10 a first input transistor having a control terminal coupled to the second terminal of
11 the input inductor, a second terminal, and a third terminal;
12 a second inductor having a first terminal coupled to the second terminal of the
13 first input transistor and to the first differentially coupled transistor pair, the second inductor also
14 having a second terminal coupled to a ground potential;
15 a supply resistor having a first terminal coupled to the second terminal of the first
16 input transistor and a second terminal coupled to a supply potential;
17 a first capacitor having a first terminal also coupled to the second terminal of the
18 first input transistor and a second terminal coupled to the second differentially coupled
19 transistor pair; and
20 a third inductor having a first terminal coupled to the second terminal of the first
21 capacitor and a second terminal coupled to the ground potential.
- 1 2. The mixer circuit according to Claim 1 wherein the first differentially coupled transistor
2 pair, the second differentially coupled transistor pair and the first input transistor are all
3 npn transistors.
- 1 3. The mixer circuit according to Claim 1 wherein the first differentially coupled transistor
2 pair, the second differentially coupled transistor pair and the first input transistor are all
3 pnp transistors.
- 1 4. The mixer circuit according to Claim 1 wherein the first differentially coupled transistor
2 pair, the second differentially coupled transistor pair and the first input transistor are all
3 MOSFET transistors.

1 5. The mixer circuit according to Claim 1 wherein the first differentially coupled transistor
2 pair, the second differentially coupled transistor pair and the first input transistor are all
3 MESFET transistors.

1 6. A mixer circuit for generating an IF output responsive to an RF input and a LO drive
2 source, comprising:
3 a mixer core having a doubly balanced mixer including a first differentially coupled npn
4 transistor pair and a second differentially coupled npn transistor pair, the mixer core coupled to
5 receive a LO drive signal, the LO drive signal having a plurality of harmonics;
6 a low noise RF input circuit coupled to the mixer core through a cascode circuit, the low
7 noise RF input circuit coupled to receive an RF input signal, wherein the cascode circuit further
8 isolates the RF input circuit from the LO drive signal and the plurality of harmonics.

1 7. A mixer as in Claim 6 wherein the cascode circuit comprises:
2 a first cascode transistor having an emitter terminal coupled to the second terminal of the
3 first capacitor and to the first terminal of the third inductor, a collector terminal coupled to the
4 second differentially coupled npn transistor pair and a base terminal,
5 a second cascode transistor having a base terminal coupled to the base terminal of the
6 first cascode transistor, an emitter terminal coupled to the first terminal of the second inductor
7 and to the emitter terminal of the first npn transistor and a collector terminal coupled to the first
8 differentially coupled npn transistor pair,
9 a second capacitor, having a first terminal coupled to the collector terminal of the first
10 cascode transistor and a second terminal coupled to the base terminal of the first cascode
11 transistor and to the base terminal of the second cascode transistor,
12 a third capacitor, having a first terminal coupled to the emitter terminal of the second
13 cascode transistor and a second terminal coupled to the second terminal of the second capacitor
14 and to the base terminal of the first cascode transistor and to the base terminal of the first
15 cascode transistor,
16 a second biasing resistor having a first terminal coupled to the second terminal of the
17 third capacitor and a second terminal coupled to a second bias voltage.

1 8. A mixer as in Claim 7, wherein the low noise RF input circuit further includes a RF
2 feedback circuit, the RF feedback circuit comprising:
3 a second npn transistor having a base terminal coupled to the supply potential, an
4 emitter terminal coupled to the collector terminal of the first input npn transistor and a collector
5 terminal coupled to the first terminal of the supply resistor and to the first terminal of the first
6 capacitor,
7 a feedback resistor, having a first terminal coupled to the base terminal of the first
8 input npn transistor and a second terminal,
9 a second capacitor, having a first terminal coupled to the second terminal of the
10 feedback resistor and a second terminal coupled to the first terminal of the supply resistor.

1 9. A mixer as in Claim 7, wherein the mixer core further includes a tracking supply circuit,
2 the tracking supply circuit comprising:
3 a first diode-connected transistor having a cathode terminal coupled to the ground
4 potential and an anode terminal,
5 a second diode-connected transistor having a cathode terminal coupled to the
6 anode terminal of the first diode connected transistor and an anode terminal,
7 a third resistor having a first terminal coupled to the anode terminal of the second
8 diode connected transistor and a second terminal,
9 a first current supply having a first terminal coupled to the second terminal of the
10 third resistor and a second terminal coupled to the supply potential,
11 a loop amplifier having a first terminal coupled to the second terminal of the third
12 resistor and to the first terminal of the first current supply, a second terminal coupled to the
13 supply potential, a third terminal coupled to the ground potential and a fourth terminal,
14 a fourth resistor having a first terminal coupled to the fourth terminal of the loop
15 amplifier and a second terminal,
16 a second npn transistor having a collector terminal coupled to the second terminal
17 of the fourth resistor, a base terminal coupled to receive a first LO drive signal and emitter
18 terminal,
19 a third npn transistor having a base terminal coupled to receive a second LO drive
20 signal, an emitter terminal coupled to the emitter terminal of the second npn transistor and a
21 collector terminal,
22 a fifth resistor having a first terminal coupled to the fourth terminal of the loop
23 amplifier and a second terminal coupled to the collector terminal of the third npn transistor
24 a second current supply having a first terminal coupled to the emitter terminal of
25 the second npn transistor and to the emitter terminal of the third npn transistor and a second
26 terminal coupled to the ground potential,
27 a first common collector amplifier having a base terminal coupled to the second
28 terminal of the fifth resistor and to the collector terminal of the third npn transistor, a collector
29 terminal coupled to the fourth terminal of the loop amplifier, and an emitter terminal coupled to
30 a first mixer core LO input,
31 a third current supply having a first terminal coupled to the emitter terminal of the
32 first common collector amplifier and a second terminal coupled to the ground potential,
33 a second common collector amplifier having a base terminal coupled to the
34 second terminal of the fourth resistor and to the collector terminal of the second npn transistor, a
35 collector terminal coupled to the fourth terminal of the loop amplifier and an emitter terminal
36 coupled to a second mixer core LO input,
37 a fourth current supply having a first terminal coupled to the emitter terminal of
38 the second common collector amplifier and a second terminal coupled to the ground potential.

1 10. A mixer as in Claim 7, wherein the low noise RF input circuit further includes a

2 tracking mixer bias current circuit coupled to the second bias input terminal, the tracking mixer
3 bias current circuit comprising:

4 a third resistor having a first terminal coupled to the supply potential and a second
5 terminal,

6 a first diode connected transistor having an anode terminal coupled to the second terminal
7 of the third resistor and a cathode terminal,

8 a second npn transistor having a collector terminal coupled to the cathode terminal of the
9 first diode connected transistor, an emitter terminal coupled to the ground potential and a base
10 terminal,

11 a loop amplifier having a first terminal coupled to the emitter terminal of the first diode
12 connected transistor and to the collector terminal of the second npn transistor, a second terminal
13 coupled to the second bias voltage and a third terminal,

14 a fourth resistor having a first terminal coupled to the base terminal of the second npn
15 transistor and a second terminal coupled to the second terminal of the loop amplifier and to the
16 second bias voltage,

17 a bandgap voltage supply having a first terminal coupled to the ground potential and a
18 second terminal coupled to the third terminal of the loop amplifier.

1 11. A mixer circuit as in Claim 6, wherein the mixer core further includes a tracking supply
2 circuit, the tracking supply circuit comprising:

3 a first diode-connected transistor having a cathode terminal coupled to the ground
4 potential and an anode terminal,

5 a second diode-connected transistor having a cathode terminal coupled to the
6 anode terminal of the first diode connected transistor and an anode terminal,

7 a third resistor having a first terminal coupled to the anode terminal of the second
8 diode connected transistor and a second terminal,

9 a first current supply having a first terminal coupled to the second terminal of the
10 third resistor and a second terminal coupled to the supply potential,

11 a loop amplifier having a first terminal coupled to the second terminal of the third
12 resistor and to the first terminal of the first current supply, a second terminal coupled to the
13 supply potential, a third terminal coupled to the ground potential and a fourth terminal,

14 a fourth resistor having a first terminal coupled to the fourth terminal of the loop
15 amplifier and a second terminal,

16 a second npn transistor having a collector terminal coupled to the second terminal
17 of the fourth resistor, a base terminal coupled to receive a first LO drive signal and emitter
18 terminal,

19 a third npn transistor having a base terminal coupled to receive a second LO drive
20 signal, an emitter terminal coupled to the emitter terminal of the second npn transistor and a
21 collector terminal,

22 a fifth resistor having a first terminal coupled to the fourth terminal of the loop
23 amplifier and a second terminal coupled to the collector terminal of the third npn transistor

24 a second current supply having a first terminal coupled to the emitter terminal of
25 the second npn transistor and to the emitter terminal of the third npn transistor and a second
26 terminal coupled to the ground potential,

27 a first common collector amplifier having a base terminal coupled to the second
28 terminal of the fifth resistor and to the collector terminal of the third npn transistor, a collector
29 terminal coupled to the fourth terminal of the loop amplifier, and an emitter terminal coupled to
30 a first mixer core LO input,

31 a third current supply having a first terminal coupled to the emitter terminal of the
32 first common collector amplifier and a second terminal coupled to the ground potential,

33 a second common collector amplifier having a base terminal coupled to the
34 second terminal of the fourth resistor and to the collector terminal of the second npn transistor, a
35 collector terminal coupled to the fourth terminal of the loop amplifier and an emitter terminal
36 coupled to a second mixer core LO input,

37 a fourth current supply having a first terminal coupled to the emitter terminal of
38 the second common collector amplifier and a second terminal coupled to the ground potential.

1 12. A mixer circuit as in Claim 6, wherein the low noise RF input circuit further includes a
2 RF feedback circuit coupled to the RF input circuit, the RF feedback circuit comprising:

3 a second npn transistor having a base terminal coupled to the supply potential, an
4 emitter terminal coupled to the collector terminal of the first input npn transistor and a collector
5 terminal coupled to the first terminal of the supply resistor and to the first terminal of the first
6 capacitor,

7 a feedback resistor, having a first terminal coupled to the base terminal of the first
8 input npn transistor and a second terminal,

9 a second capacitor, having a first terminal coupled to the second terminal of the
10 feedback resistor and a second terminal coupled to the first terminal of the supply resistor.

1 13. A quadrature mixer circuit for generating a quadrature IF output responsive to an RF
2 input and a quadrature pair of LO drive signals, comprising:

3 a mixer core having a first doubly balanced mixer including a first differentially
4 coupled npn transistor pair and a second differentially coupled npn transistor pair and a second
5 doubly balanced mixer including a third differentially coupled npn transistor pair and a fourth
6 differentially coupled npn transistor pair;

7 an RF input circuit coupled to the mixer core, the RF input circuit comprising:

8 an input inductor having a first terminal coupled to receive an RF input signal and
9 a second terminal;

10 a biasing resistor having a first terminal coupled to the second terminal of the
11 input inductor and a second terminal coupled to a first bias voltage;

12 a first input npn transistor having a base terminal coupled to the second terminal
13 of the input inductor, an emitter terminal, and a collector terminal;

14 a second inductor having a first terminal coupled to the emitter of the first npn
15 transistor and to the first differentially coupled npn transistor pair and to the third differentially

coupled npn transistor pair, the second inductor also having a second terminal coupled to a ground potential;
a supply resistor having a first terminal coupled to the collector of the first transistor and a second terminal coupled to a supply potential;
a first capacitor having a first terminal also coupled to the collector of the first transistor and a second terminal coupled to the second differentially coupled npn transistor pair and to the fourth differentially coupled npn transistor pair; and
a third inductor having a first terminal coupled to the second terminal of the first capacitor and a second terminal coupled to the ground potential.

14. A quadrature mixer circuit for generating a quadrature IF output responsive to an RF input and a quadrature pair of LO drive signals, comprising:
a mixer core having a first doubly balanced mixer including a first differentially coupled npn transistor pair and a second differentially coupled npn transistor pair and having a second doubly balanced mixer including a third differentially coupled npn transistor pair and a fourth differentially coupled npn transistor pair; the mixer core coupled to receive a quadrature LO drive signal, the quadrature LO drive signal having a plurality of harmonics;
a low noise RF input circuit coupled to the mixer core through a cascode circuit, the low noise RF input circuit coupled to receive an RF input signal, wherein the cascode circuit further isolates the RF input circuit from the quadrature LO drive signal and the plurality of harmonics.

15. A quadrature mixer as in Claim 14 wherein the cascode circuit comprises:
a first cascode transistor having an emitter terminal coupled to the second terminal of the first capacitor and to the first terminal of the third inductor, a collector terminal coupled to the second differentially coupled npn transistor pair and a base terminal,
a second cascode transistor having a base terminal coupled to the base terminal of the first cascode transistor, an emitter terminal coupled to the first terminal of the second inductor and to the emitter terminal of the first npn transistor and a collector terminal coupled to the first differentially coupled npn transistor pair,
a second capacitor, having a first terminal coupled to the collector terminal of the first cascode transistor and a second terminal coupled to the base terminal of the first cascode transistor and to the base terminal of the second cascode transistor,
a third capacitor, having a first terminal coupled to the emitter terminal of the second cascode transistor and a second terminal coupled to the second terminal of the second capacitor and to the base terminal of the first cascode transistor and to the base terminal of the first cascode transistor,
a second biasing resistor having a first terminal coupled to the second terminal of the second capacitor and the first terminal of the third capacitor and a second terminal coupled to a second bias voltage,
a third biasing resistor having a first terminal coupled to the second bias voltage and to the second terminal of the second biasing resistor and having a second terminal,

21 a third cascode transistor having a collector terminal coupled to the fourth differentially
22 coupled npn transistor pair, an emitter terminal coupled to the second terminal of the third
23 inductor and to the emitter terminal of the first cascode transistor, and a base terminal,
24 a fourth cascode transistor having a base terminal coupled to the base terminal of the
25 third cascode transistor, a collector terminal coupled the third differentially coupled npn
26 transistor pair and an emitter terminal coupled to the emitter terminal of the second cascode
27 transistor and to the second terminal of the second inductor,
28 a fourth capacitor having a first terminal coupled to the emitter terminal of the third
29 cascode transistor and a second terminal coupled to the base terminal of the third and fourth
30 cascode transistors,
31 a fifth capacitor having a first terminal coupled to the second terminal of the fourth
32 capacitor and to the base terminals of the third and fourth cascode transistors and a second
33 terminal coupled to the emitter terminal of the fourth cascode transistor.

1 16. A quadrature mixer as in Claim 15 wherein the low noise RF input circuit further
2 includes a RF feedback circuit, the RF feedback circuit comprising:
3 a second npn transistor having a base terminal coupled to the supply
4 potential, an emitter terminal coupled to the collector terminal of the first input npn transistor
5 and a collector terminal coupled to the first terminal of the supply resistor and to the first
6 terminal of the first capacitor,
7 a feedback resistor, having a first terminal coupled to the base terminal of
8 the first input npn transistor and a second terminal,
9 a sixth capacitor, having a first terminal coupled to the second terminal of
10 the feedback resistor and a second terminal coupled to the first terminal of the supply resistor.

1 17. A quadrature mixer as in Claim 16, wherein the mixer core further includes a first
2 tracking supply circuit portion coupled to the In-Phase LO drive input terminals of the
3 mixer core and a second tracking supply circuit portion coupled to the Quadrature Phase
4 LO drive input terminals of the mixer core.

1 18. A mixer circuit as in Claim 17, wherein the first tracking supply comprises:
2 a. a first diode-connected transistor having a cathode terminal coupled to the ground
3 potential and an anode terminal;
4 b. a second diode-connected transistor having a cathode terminal coupled to the
5 anode terminal of the first diode connected transistor and an anode terminal,
6 c. a third resistor having a first terminal coupled to the anode terminal of the second
7 diode connected transistor and a second terminal;
8 d. a first current supply having a first terminal coupled to the second terminal of the
9 third resistor and a second terminal coupled to the supply potential;
10 e. a loop amplifier having a first terminal coupled to the second terminal of the third
11 resistor and to the first terminal of the first current supply, a second terminal

- 12 coupled to the supply potential, a third terminal coupled to the ground potential
13 and a fourth terminal;
- 14 f. a fourth resistor having a first terminal coupled to the fourth terminal of the loop
15 amplifier and a second terminal;
- 16 g. a second npn transistor having a collector terminal coupled to the second terminal
17 of the fourth resistor, a base terminal coupled to receive a first LO drive signal
18 and emitter terminal;
- 19 h. a third npn transistor having a base terminal coupled to receive a second LO drive
20 signal, an emitter terminal coupled to the emitter terminal of the second npn
21 transistor and a collector terminal;
- 22 i. a fifth resistor having a first terminal coupled to the fourth terminal of the loop
23 amplifier and a second terminal coupled to the collector terminal of the third npn
24 transistor;
- 25 j. a second current supply having a first terminal coupled to the emitter terminal of
26 the second npn transistor and to the emitter terminal of the third npn transistor
27 and a second terminal coupled to the ground potential;
- 28 k. a first common collector amplifier having a base terminal coupled to the second
29 terminal of the fifth resistor and to the collector terminal of the third npn
30 transistor, a collector terminal coupled to the fourth terminal of the loop
31 amplifier, and an emitter terminal coupled to a first mixer core LO input;
- 32 l. a third current supply having a first terminal coupled to the emitter terminal of the
33 first common collector amplifier and a second terminal coupled to the ground
34 potential;
- 35 m. a second common collector amplifier having a base terminal coupled to the
36 second terminal of the fourth resistor and to the collector terminal of the second
37 npn transistor, a collector terminal coupled to the fourth terminal of the loop
38 amplifier and an emitter terminal coupled to a second mixer core LO input; and
- 39 n. a fourth current supply having a first terminal coupled to the emitter terminal of
40 the second common collector amplifier and a second terminal coupled to the
41 ground potential;
- 42 and wherein the second tracking supply circuit portion comprises:
- 43 o. a third diode-connected transistor having a cathode terminal coupled to the
44 ground potential and an anode terminal;
- 45 p. a fourth diode-connected transistor having a cathode terminal coupled to the
46 anode terminal of the third diode connected transistor and an anode terminal;
- 47 q. a third resistor having a first terminal coupled to the anode terminal of the second
48 diode connected transistor and a second terminal;
- 49 r. a first current supply having a first terminal coupled to the second terminal of the
50 third resistor and a second terminal coupled to the supply potential;
- 51 s. a loop amplifier having a first terminal coupled to the second terminal of the third
52 resistor and to the first terminal of the first current supply, a second terminal
53 coupled to the supply potential, a third terminal coupled to the ground potential
54 and a fourth terminal;

- t. a fourth resistor having a first terminal coupled to the fourth terminal of the loop amplifier and a second terminal;
- u. a second npn transistor having a collector terminal coupled to the second terminal of the fourth resistor, a base terminal coupled to receive a first LO drive signal and emitter terminal;
- v. a third npn transistor having a base terminal coupled to receive a second LO drive signal, an emitter terminal coupled to the emitter terminal of the second npn transistor and a collector terminal;
- w. a fifth resistor having a first terminal coupled to the fourth terminal of the loop amplifier and a second terminal coupled to the collector terminal of the third npn transistor;
- x. a second current supply having a first terminal coupled to the emitter terminal of the second npn transistor and to the emitter terminal of the third npn transistor and a second terminal coupled to the ground potential;
- y. a first common collector amplifier having a base terminal coupled to the second terminal of the fifth resistor and to the collector terminal of the third npn transistor, a collector terminal coupled to the fourth terminal of the loop amplifier, and an emitter terminal coupled to a first mixer core LO input;
- z. a third current supply having a first terminal coupled to the emitter terminal of the first common collector amplifier and a second terminal coupled to the ground potential;
- aa. a second common collector amplifier having a base terminal coupled to the second terminal of the fourth resistor and to the collector terminal of the second npn transistor, a collector terminal coupled to the fourth terminal of the loop amplifier and an emitter terminal coupled to a second mixer core LO input;
- bb. a fourth current supply having a first terminal coupled to the emitter terminal of the second common collector amplifier and a second terminal coupled to the ground potential.

19. A quadrature mixer as in Claim 15, wherein the low noise RF input circuit further includes a tracking mixer bias current circuit, the tracking bias current circuit comprising:
- a first resistor having a first terminal coupled to the supply potential and a second terminal,
 - a first diode connected transistor having a anode terminal coupled to the second terminal of the third resistor and a cathode terminal,
 - a second npn transistor having a collector terminal coupled to the cathode terminal of the first diode connected transistor, an emitter terminal coupled to the ground potential and a base terminal,
 - a loop amplifier having a first terminal coupled to the emitter terminal of the first diode connected transistor and to the collector terminal of the second npn transistor, a second terminal coupled to the second bias voltage and a third terminal,

14 a second resistor having a first terminal coupled to the base terminal of the second
15 npn transistor and a second terminal coupled to the second terminal of the loop amplifier and to
16 the second bias voltage,
17 a bandgap voltage supply having a first terminal coupled to the ground potential
18 and a second terminal coupled to the third terminal of the loop amplifier.

1 20. A mixer circuit for generating an IF output responsive to an RF input and a LO drive
2 source, comprising:
3 a mixer core having a doubly balanced mixer including a first differentially coupled npn
4 transistor pair and a second differentially coupled npn transistor pair;
5 a single ended RF input circuit coupled to receive an RF signal, the RF circuit coupled to
6 the mixer core, the RF circuit including means for providing an input impedance, means for
7 splitting a phase of the RF signal, and means for decoupling noise from the RF signal to the
8 mixer core.

1 21. A mixer circuit for generating an IF output responsive to an RF input and a LO drive
2 source, comprising:
3 a mixer core having a doubly balanced mixer including a first differentially coupled npn
4 transistor pair and a second differentially coupled npn transistor pair, the mixer core coupled to
5 receive a LO drive signal, the LO drive signal having a plurality of harmonics;
6 a low noise single ended RF input circuit coupled to the mixer core through a cascode
7 circuit, the low noise RF input circuit coupled to receive an RF input signal, wherein the cascode
8 circuit further isolates the RF input circuit from the LO drive signal and the plurality of
9 harmonics the RF circuit including means for providing an input impedance and means for
10 splitting a phase of the RF signal.

Abstract

The mixer circuit is a singled ended input to a double balanced high dynamic range mixer with only two base-emitter junctions across the supply. It provides for the use of bondwires to off chip ground as DC block and DC feed elements. The single ended input and differential output balanced mixer is well suited for the input stage of an integrated radio receiver - off chip circuitry is usually single ended, but on chip circuits are usually differential. No off chip differential RF circuits or baluns are required which reduces off chip component count and improves radio performance. The mixer circuit has lower LO drive requirements because of the DC coupled LO port. This results in better radio performance and a smaller die area because of the DC coupled IF port.

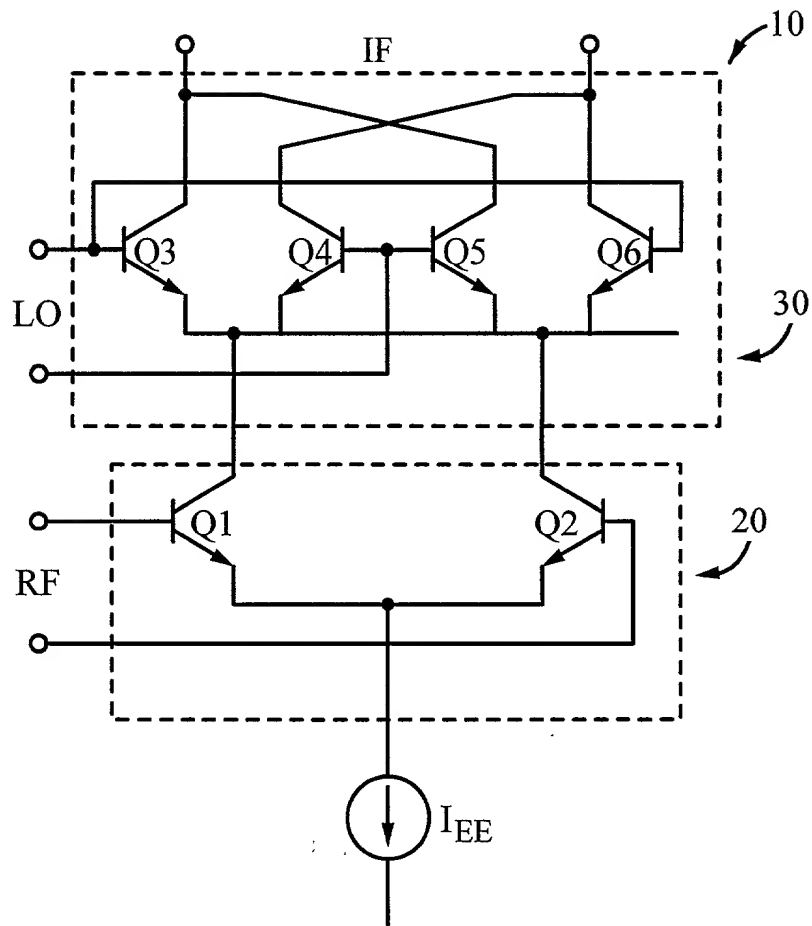


Fig. 1 PRIOR ART





Fig. 2 PRIOR ART






Fig. 4

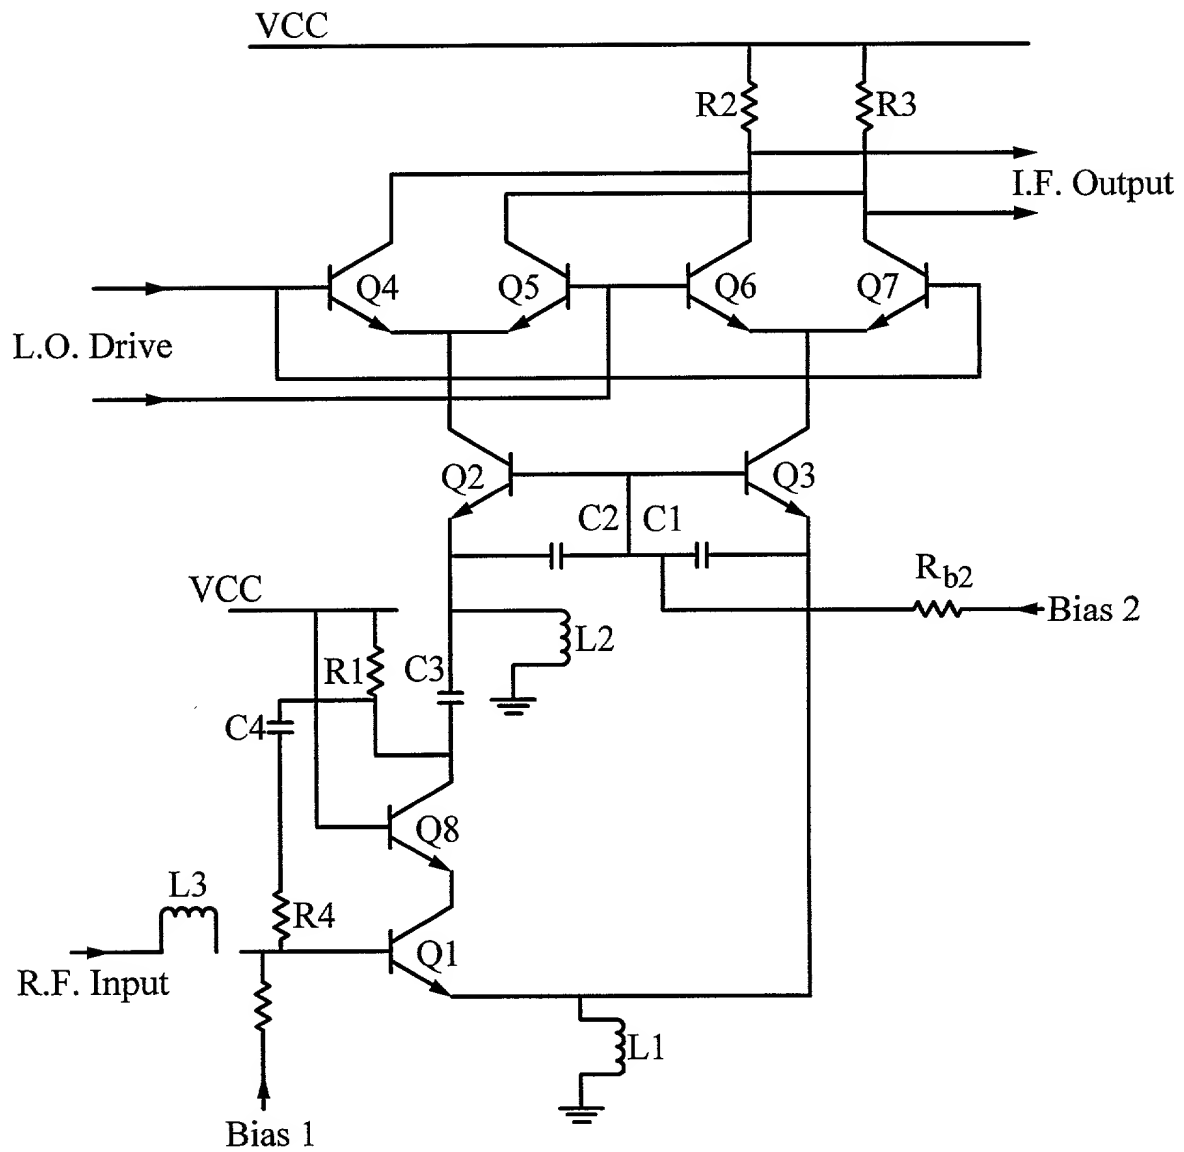


Fig. 5

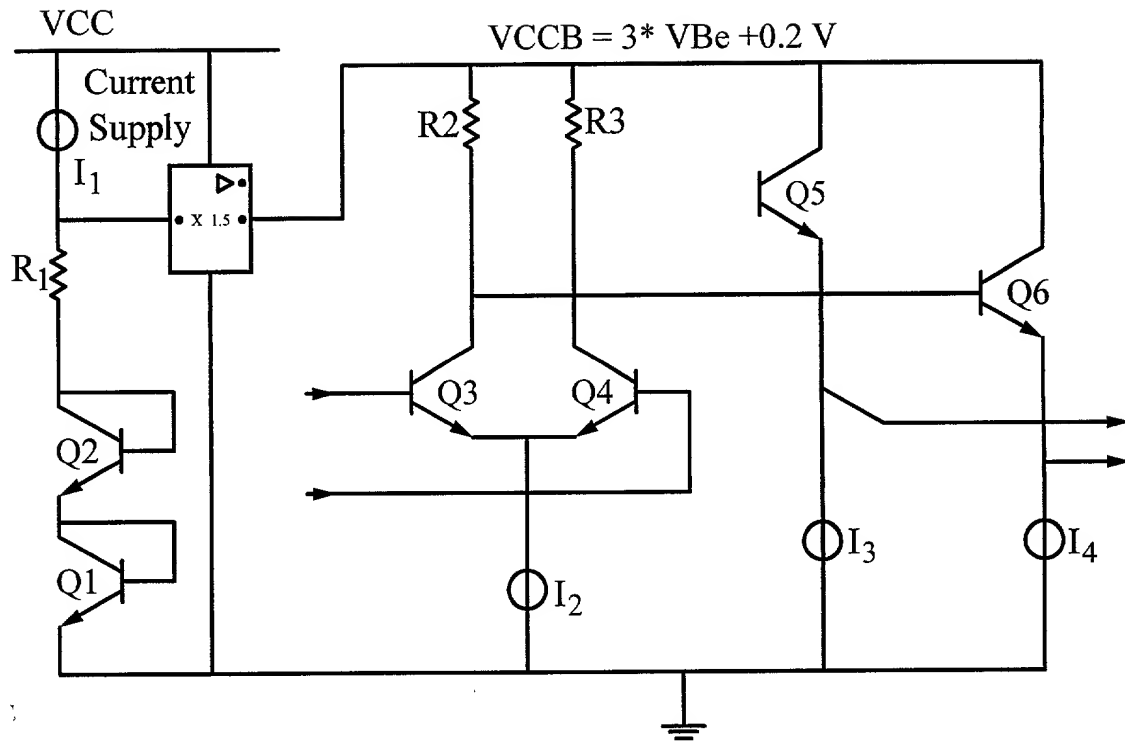
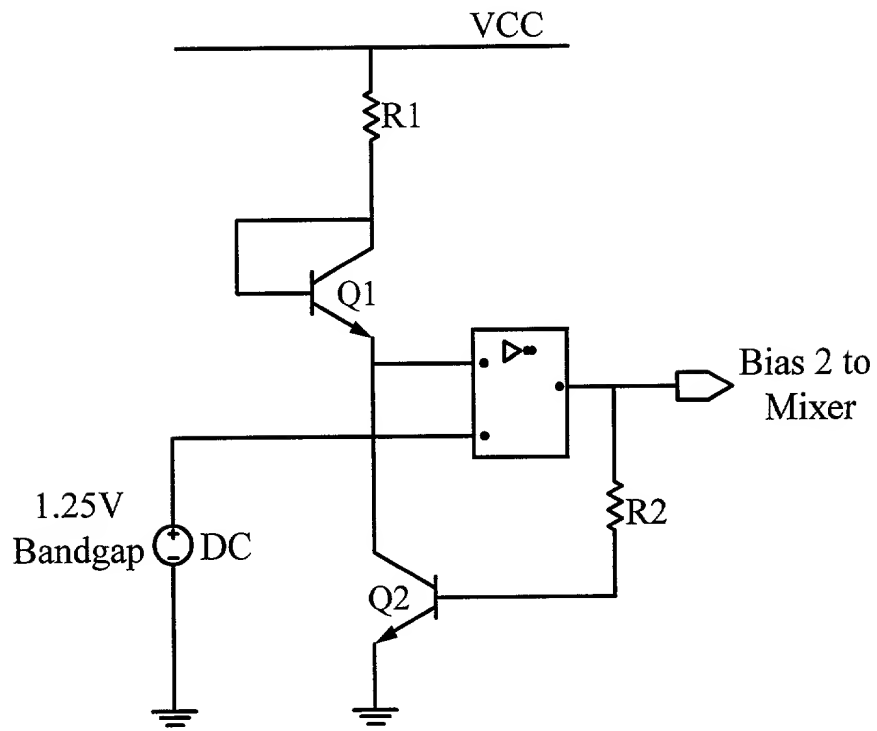


Fig. 6

*Fig. 7*

EXPRESS MAIL LABEL #EL703212555US

PATENT
 Attorney Docket No. MLNR 0001
 0210

DECLARATION FOR PATENT APPLICATION

As a below-named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated next to my name. I believe I am an original, first and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled: **NOVEL TOPOLOGY FOR A SINGLE ENDED INPUT DUAL BALANCED MIXER**. The specification of which is attached hereto). I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

Priority Claim

Yes No

--	--

Number

Country

Day/Month/Year Filed

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Application Serial No.

Filing Date


Status: Patented, Pending, Abandoned

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below:

60/167,188
 Application Serial No.

November 23, 1999
 Filing Date

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of First Joint Inventor: Gwilym Francis LuffInventor's Signature: 

Date

Residence: 18, The Hectare, Great Shelford, Cambridge CB2 5AT, United KingdomCitizenship: BritishPost Office Address: 18, The Hectare, Great Shelford, Cambridge CB2 5AT, United KingdomFull Name of Second Joint Inventor: Selçuk Şen

Inventor's Signature: _____

Date

Residence: 1063 Morse Avenue #14-303, Sunnyvale, California 94089Citizenship: TurkeyPost Office Address: 1063 Morse Avenue #14-303, Sunnyvale, California 94089